




TEREX®

ENVIRONMENTAL EQUIPMENT TECHNICAL SPECIFICATIONS

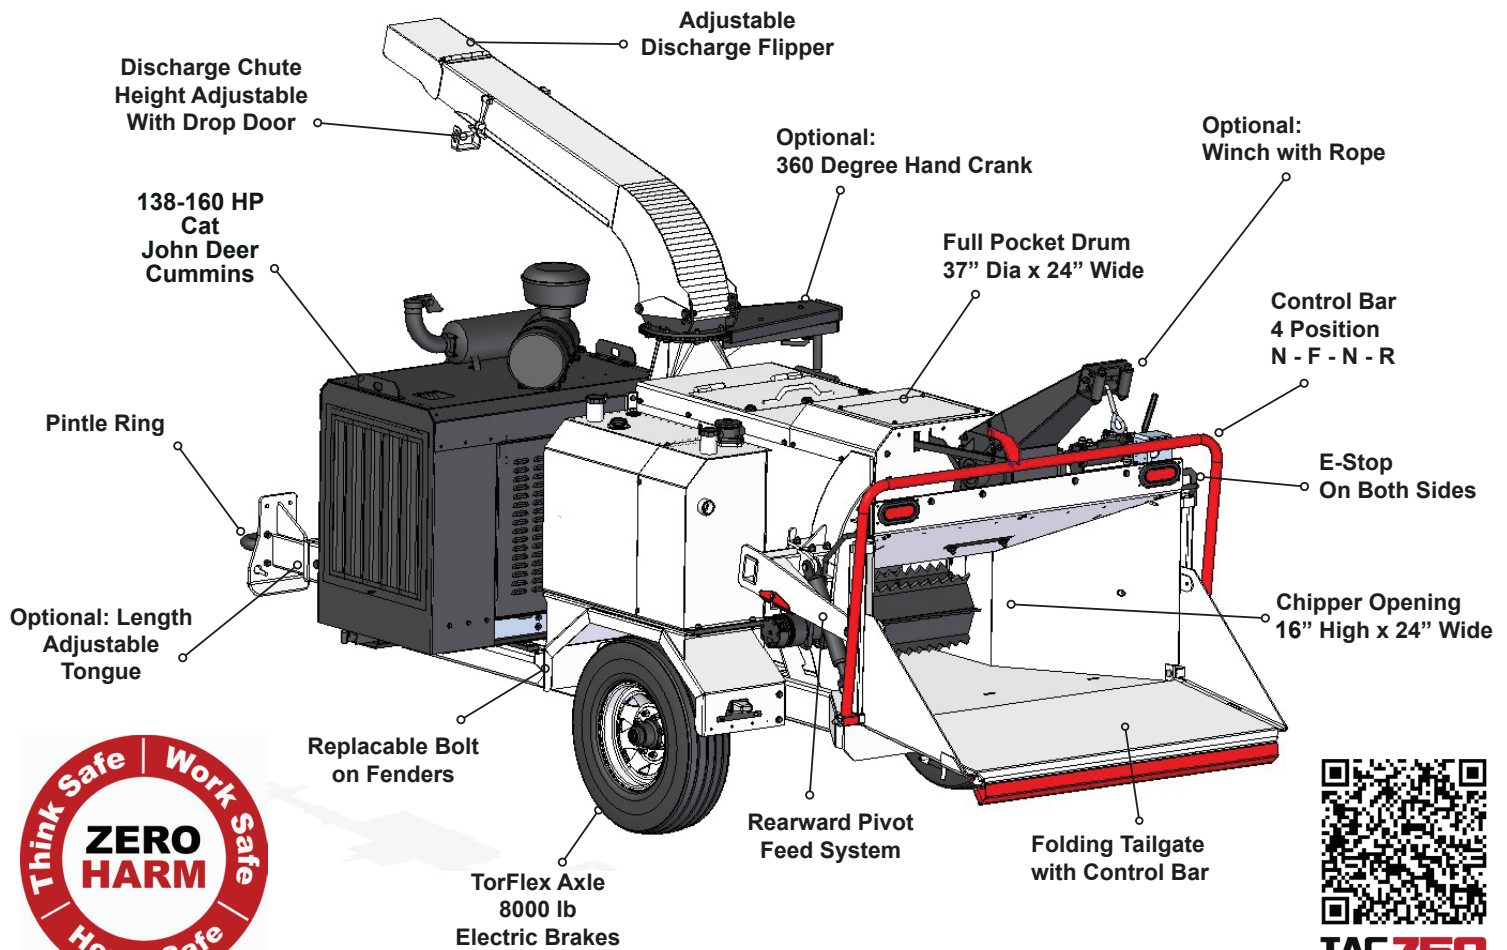

TAC 750
WOODSMAN

TAC 750 Brush Chipper Specifications

16" Capacity Towable Chipper, Hydraulic Feed Roll, Top Discharge

SPECIFICATIONS

Operating Weight	7,200 lbs
Chipping Capacity	16"
Gross Engine Power	160 hp
Engine Options	Caterpillar
	John Deere
	Cummins

FEATURES

Drum Size	24" wide by 37" diameter
Infeed Opening	16" high by 24"
Feed Control	Programmable
Hydraulic	Hydraulic lift and crush on feed wheel
Jack:	10,000 lbs. drop leg jack

DIMENSIONS

Width	75"
Height	106"
Length	238"
Transport Length	213"

Engine/Drive

- Make/Model:
- Max hp:
- Max Torque:
- Fuel:
- Cylinders:
- Fuel Tank Capacity (gl):
- Oil capacity (qt):
- Cooling Medium:
- Coolant Capacity (gl):
- Drive:
- Warning / Shutdown System:

750

John Deere/PowerTech E 4.5 L
CAT C4.4 138hp
Cummins QSB 4.5 160hp
387 ft-lb @ 1,500 rpm
Diesel
4
38
15.5
Liquid
5
PTO Clutch / Belt
High Temp., Low Oil & Low Fuel Pressure



TEREX®

TAC Woodsman 750

Cutting System

- Drum Size:
- Drum Speed (rpm):
- Knives:
- Anvil:
- Drum Safety Lock Positions:

37" dia. x 24" width full pocket
1,321.93 rpm
(4) Double Edged - 2 Pocket
4 edges, 1" Steel
2

Feed System

- Infeed Opening:
- Feed Table Height:
- Feed Table Length:
- Feed Wheel Diameter:
- Feed Wheel Length:
- Feed Wheel Spring Clamp Force Avg. (lbf):
- Feed Wheel Hyd. Lift & Crush (lbf):
- Feed Rate (fpm):
- Motor Displacement (cu. in.):
- Feed Control:
- Bar Actuation Force (lbs.):
- Bar Positions:
- Yoke Safety Lock Position:

16" High x 24" Wide
24"
60.5"
14.125
24"
441.44
1,107.80
99.26
45.6 cu. in.
4 Position Detent Bar w/ Programmable Rev. Autofeed Governor
-
E-Stop, Forward, Stop & Reverse
1

Feed Safety System

- Bottom Feed Stop Bar:
- Bar Actuation Force (lbs.):
- Reset Method:
- E-Stops (Infeed Sides):

10 Ga. Steel
34
Momentary Push Button
Push / Pull Knob

Discharge System

- Discharge Height:
- Chute Rotation:
- Rotation Type:
- Height Adjustable:

106"
300°
Manual (Standard Latch)
3 Position

Chassis

- Frame:
- Hitch Type:
- Tool Box:
- Wheels:
- Tires:
- Axle:
- Brakes:
- Jack:

1/4" Steel
3" PINTLE
Yes
16" 8 on 6.5 B.C.
LT 265/75R16 (10 Ply)
8,000 lb torsion axle
Electric w/Breakaway Switch
10,000 lb. Drop Leg

Hydraulic

- System
- Hydraulic Tank Capacity
- Filtration:
- Pump (gpm):
- System Relief (psi):
- Valves:
- Hydraulic Connections:

(Live) Open Center
18
10 Micron Return / 150 Micron Suction
10.6
2,500
Modular Solenoid Operated
O-Ring / O-Ring Face Seal

Electrical

- System Voltage:
- Battery:
- Standard Gauges:
- Trailer Plug Connection:
- Lights:

12V
12V 800 CCA
Tachometer, Multifunction Display
6-Hole Round
Turning, license, brake, tail & side marker, fuel, hour, voltage, water temp. and oil pressure

Weights




- Tongue Weight (lbs.):
- Operating Weight (lbs.):

-
7,200

Dimensions

- Width:
- Height:
- Length:
- Transport Length:

72"
106"
238"
213"

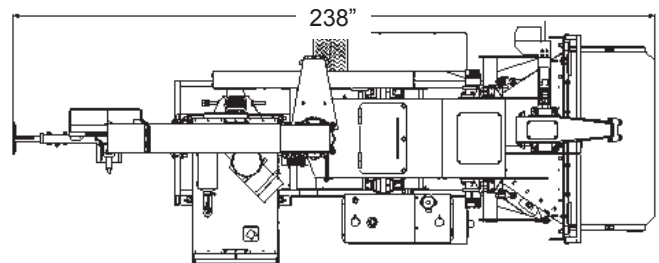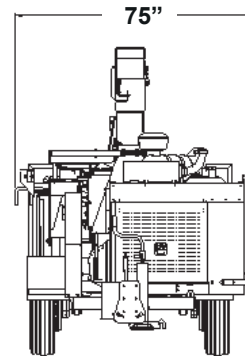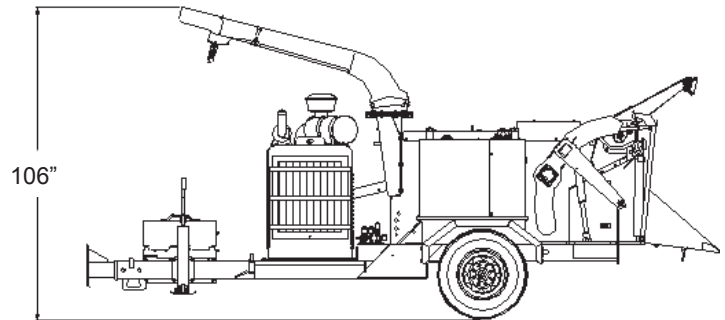

www.terex.com/environmental-equipment

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries.

© 2013 Terex Corporation.

Terex Environmental Equipment - 1250 Commerce Drive - Farwell, MI 48622 USA
Tel +1 (989) 588-4295 - salesenvironmental@terex.com

WORKS FOR YOU.™