


RM J110X

DEPENDABLE PERFORMANCE

Welcome! to our world

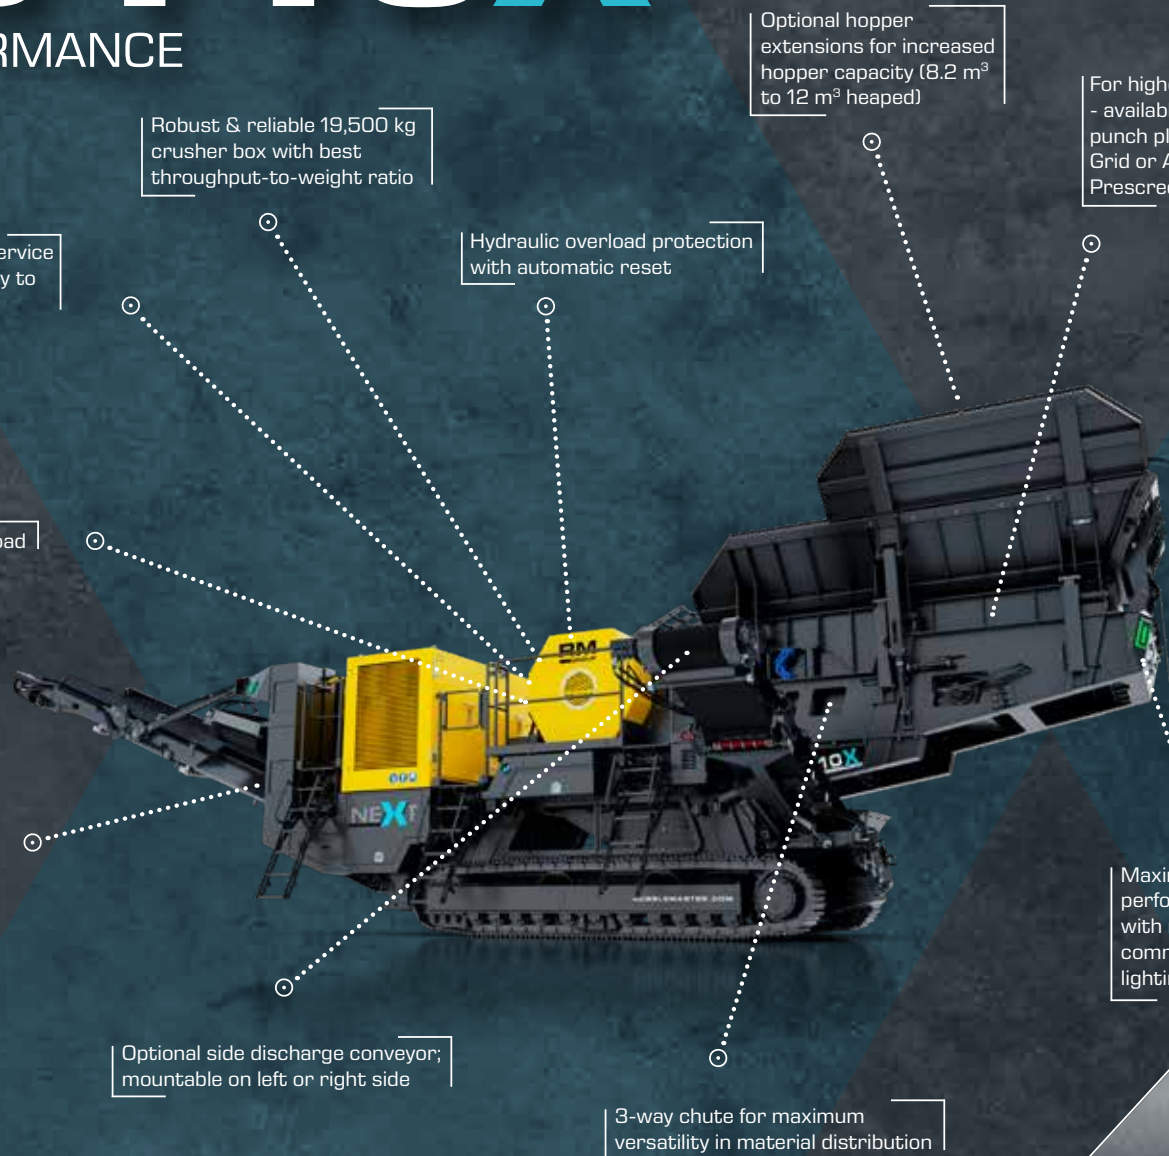

Optimized service accessibility to fixed jaw

Robust & reliable 19,500 kg crusher box with best throughput-to-weight ratio

Hydraulic overload protection with automatic reset

Optional hopper extensions for increased hopper capacity (8.2 m³ to 12 m³ heaped)

For highest user flexibility - available with grizzly/punch plate/RM Active Grid or Active Prescreen 2D


Easy startup under load



Optimized material flow due to a 1,200 mm wide conveyor belt; hydraulically lowerable and completely removable with minimal effort

Optional side discharge conveyor; mountable on left or right side

3-way chute for maximum versatility in material distribution



RM J110X

DEPENDABLE PERFORMANCE

XTREMELY EFFICIENT

XTREMELY POWERFUL

XTREMELY MODULAR

XTREMELY USER FRIENDLY



CRUSHING CAPACITY

Up to 450 tph (depending on application)

FEED SIZE

Up to an edge length of 850 mm
or 600 x 600 x 600 mm

CRUSHER DETAILS

Feed opening: 1,100 mm x 700 mm
Type: Single toggle
Weight: 19,500 kg
CSS range: 45 mm – 175 mm (acc. to application)
(320 mm max in overload situation)

HOPPER

Hydraulic folding & self-locking hopper walls
12 mm thick Hardox 450
Width: 2,530 mm
Length: 4,600 mm
Level capacity: 6.15 m³

GRIZZLY FEEDER

Width: 1,080 mm
Length: 4,240 mm
Top deck size: 1,080 mm x 2,000 mm
Bottom deck size: 1,070 mm x 1,300 mm

DIESEL TANK CAPACITY

660 litres

OPTIONAL SIDE CONVEYOR

Belt width: 650 mm
Discharge height: 2.5 m

POWERPACK

Cat C9.3B Stage 3a or Stage 5

MAIN CONVEYOR

Belt width: 1,200 mm
Discharge height: 3.9 m

TRANSPORT DIMENSIONS

Length: 14.7 m
Width: 2.85 m
Height: 3.4 m
Transport weight (no options):
~ 52,000 kg

